

NK-VN2300PT | Tube End Type

◆ APPLICATION

- Easy installation and adjustment
- Resistant to collapse under vacuum
- Absorb Movement and Displacement
- Vibration and Noise Reduction
- Compensate for Misalignment


◆ FEATURES

- Applicable Media
Water, Air, Gas
- Working Pressure
FV ~ 0.3MPa
- Working Temperature
-15 Deg. C ~ 150 Deg. C.
*Disregard working pressure
- End Connection: JIS
*Special standard is available on request



STRUCTURE

No	Parts Name	Material
1	Tube	Stainless Steel (304 . 316L)
2	End Pipe	Stainless Steel

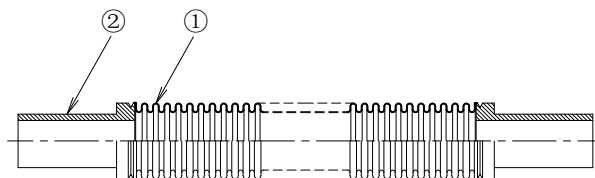

Unit (mm)

SPECIFICATION

Size		Tube information			End pipe information			Min. OAL
DN	Inch	ID	OD	Min. Bending Radius	PD	PT	PL	
DN3		3.5	5	25	3.18	0.79	15	100
DN6	1/4	5.5	8.5	25	6.35	0.92	20	100
DN10	3/8	10	13.5	35	9.52	1.26	25	100
DN15	1/2	12.5	16.5	40	12.7	1.35	30	100

Calculated on CLT Tube at -0.3Mpa, 40 Deg. C

INSTALLATION GUIDE

- Metal flexible hoses should be bent and used only to the radius and lateral movement specified in their guidelines to prevent fatigue and failure.
- Twisting of metal flexible hoses should be avoided while installing and using as well.
- For guidance on dynamic movement, please contact us.

NOTES

- The information in this catalog may be subject to updates or modifications without prior notice.
- Special lengths are available on request.

